


DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
QF/RD/05	01	00	AK 650	03.05.12	
TECHNICAL SPECIFICATIONS				SIGNATURE	
				PRESIDENT (TECHNICAL)	

FULL BODY HARNESS (AK 650)

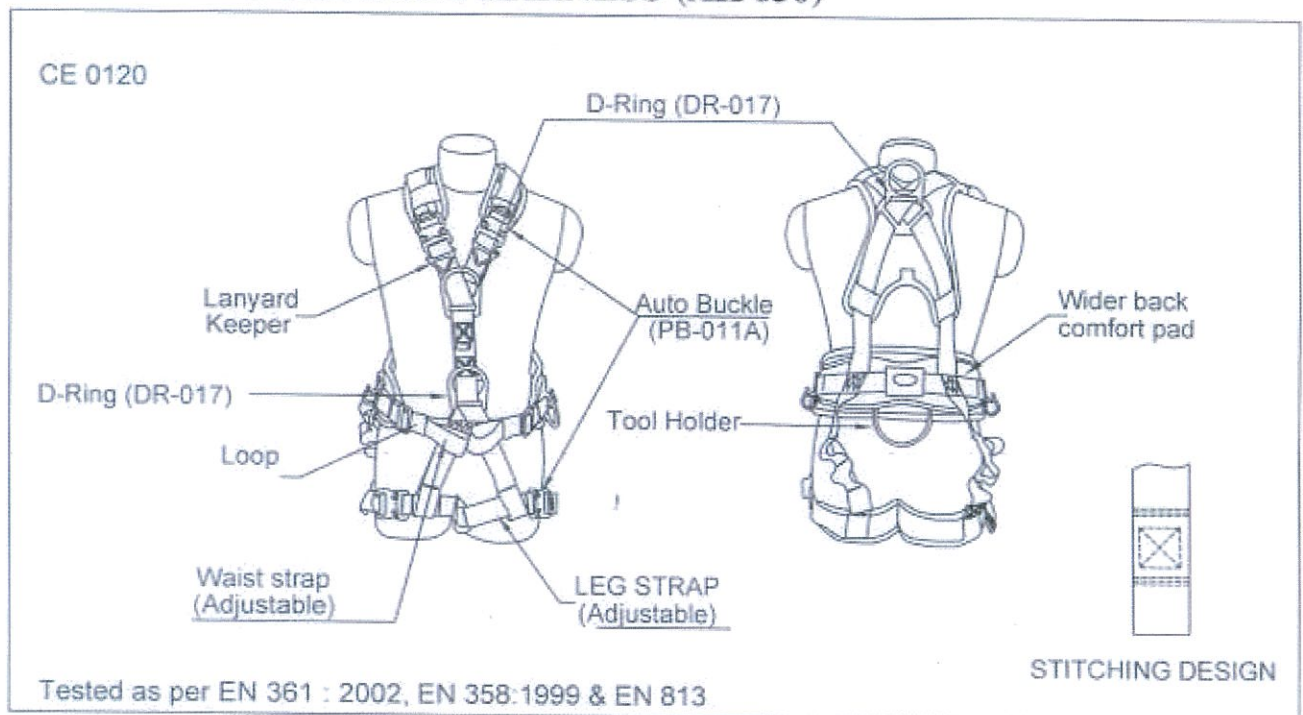

DESIGN

- One dorsal attachment D-ring for fall arrest.
- One front attachment D-Ring at chest for fall arrest.
- Two lateral D-rings at waist for positioning.
- One front D-Ring at waist level for rope access.
- Adjustable shoulder & leg straps to enhance user ergonomics.
- Comfort padding at the back , leg straps & waist to enhance user ergonomics.

WEBBING

- Material : Polyester.
- Width : 44±1mm.
- Breaking strength : 23 KN (Min)
- : 30 KN (Min) (For Belt only)

STITCHING THREAD

- Material : High-tenacity polyamide
- Colour : White

METAL COMPONENTS

- Material : High Strength steel.
- Plating : Zinc plated.
- Finish : Black Powder coated.

VITAL TEST COMPLIANCE

- Static Strength : Each attachment element tested at 15 KN or 1,530 kgf for 3 Minutes.

WEIGHT

- : 2410gm ±10% gm.